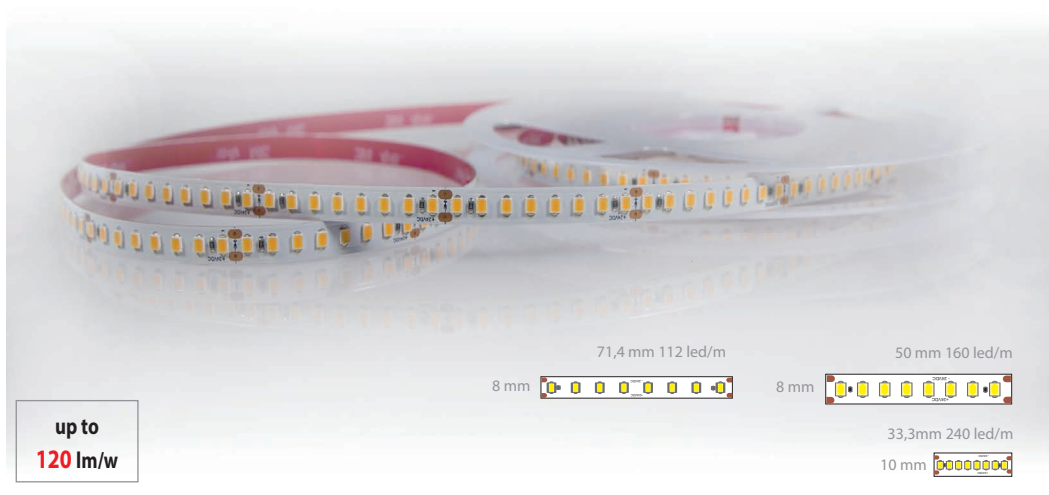


10/21,6  
Watt/m

IP 20

CRI&gt;95

t<sub>a</sub> -10°÷ +40°C

Part Number	CCT (K)	Lumen/m	Ra	LED/m	V (Typ)	Cur	W/m	IP	EEC*
A41A2411C027	2700K	1000	97	112	24V/DC	71,4mm	10W	IP20	F
A41A2411C030	3000K	1100	97	112	24V/DC	71,4mm	10W	IP20	F
A41A2411C040	4000K	1120	97	112	24V/DC	71,4mm	10W	IP20	F
A41A2411C065	6500K	1210	95	112	24V/DC	71,4mm	10W	IP20	E
A41A2416C027	2700K	1420	97	160	24V/DC	50mm	14,4W	IP20	F
A41A2416C030	3000K	1630	97	160	24V/DC	50mm	14,4W	IP20	F
A41A2416C040	4000K	1660	97	160	24V/DC	50mm	14,4W	IP20	F
A41A2416C065	6500K	1740	95	160	24V/DC	50mm	14,4W	IP20	F
A41A2424C027	2700K	2140	97	240	24V/DC	33,3mm	21,6W	IP20	F
A41A2424C030	3000K	2290	98	240	24V/DC	33,3mm	21,6W	IP20	F
A41A2424C040	4000K	2440	97	240	24V/DC	33,3mm	21,6W	IP20	F
A41A2424C065	6500K	2600	95	240	24V/DC	33,3mm	21,6W	IP20	E

\*\* The EEC specification refers in each case to the installed light source(s)



Datasheet download

### Strisce flessibili a LED 24V autoadesive IP20

- Elevato CRI Ra>95
- 112 led/m - 10W/m - LED2835
- 160 led/m - 14,4W/m - LED2835
- 240 led/m - 21,6W/m - LED2835
- Superiore durata nel tempo, adesivo resistente 3M VHB
- Disponibile nei colori standard 2700K, 3000K, 4000K e 6500K
- Fornite in nastro da 5m e cavetto di raccordo.

### 24V Flexible adhesive LED strips IP20

- High CRI Ra>95
- 112 led/m - 10W/m - LED2835
- 160 led/m - 14,4W/m - LED2835
- 240 led/m - 21,6W/m - LED2835
- High life time - Fitted with high resistant 3M VHB adhesive tape
- Available in standard 2700K, 3000K, 4000K e 6500K
- Supplied in 5m roll with connecting cable

