

12/20
Watt/m

IP 65


CRI>80



t_a -10° ÷ +40°C



up to
140 lm/w

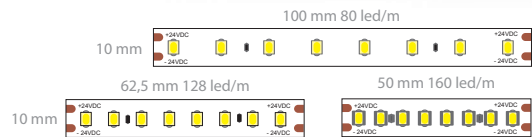

Part Number	CCT (K)	Lumen/m	LED/m	V (Typ)	Cut	W/m	IP	EEC*
A41B24080A27	2700K	1460	80	24V/DC	100mm	12W	IP65	E
A41B24080A30	3000K	1590	80	24V/DC	100mm	12W	IP65	E
A41B24080A40	4000K	1690	80	24V/DC	100mm	12W	IP65	E
A41B24128A27	2700K	1950	128	24V/DC	62,5mm	16W	IP65	E
A41B24128A30	3000K	2040	128	24V/DC	62,5mm	16W	IP65	E
A41B24128A40	4000K	2260	128	24V/DC	62,5mm	16W	IP65	E
A41B24160A27	2700K	2380	160	24V/DC	50mm	20W	IP65	E
A41B24160A30	3000K	2540	160	24V/DC	50mm	20W	IP65	E
A41B24160A40	4000K	2840	160	24V/DC	50mm	20W	IP65	E

** The EEC specification refers in each case to the instalLED light source(s)



Datasheet download

Strisce flessibili a LED 24V autoadesive IP65

- LED 2835 ad alta efficienza e a bassa caduta di tensione
- Realizzata in moduli da 8 LED per una diminuzione delle perdite in calore e migliore resa luminosa
- Consumo ridotto, alto rendimento
- Disponibile nei colori standard 2700K, 3000K e 4000K
- Fornite in nastro da 5m e cavetto di raccordo.

24V Flexible adhesive LED strips IP65

- LED 2835 with high lumen efficiency and low voltage drop
- 8LED segment for a reduction of heat losses and higher lumen efficiency
- Reduced consumption, higher efficiency
- Available in standard 2700K, 3000K and 4000K
- Supplied in 5m roll with connecting cable

