

5÷10
Watt



IP 00

CRI>80

CE

EMC

M


M

F

ta -20°÷ +40°C



II

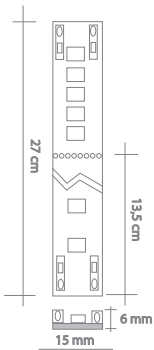

Part Number	CCT (K)	Lumen Typ.	Lux @1m	V (Typ)	I max	W	Dimensions	EEC**
A40BAR052427	2700K	575	150	24VDC	210 mA	5W	270 x 15 x 6	F
A40BAR05240W	3000K	605	155	24VDC	210 mA	5W	270 x 15 x 6	E
A40BAR05240N	4000K	635	165	24VDC	210 mA	5W	270 x 15 x 6	E
A40BAR05240B	5000K	655	172	24VDC	210 mA	5W	270 x 15 x 6	E
A40BAR102427	2700K	1145	286	24VDC	420 mA	10W	270 x 15 x 6	F
A40BAR10240W	3000K	1210	292	24VDC	420 mA	10W	270 x 15 x 6	E
A40BAR10240N	4000K	1265	308	24VDC	420 mA	10W	270 x 15 x 6	E
A40BAR10240B	5000K	1309	320	24VDC	420 mA	10W	270 x 15 x 6	E

** The EEC specification refers in each case to the installed LED light source(s)

 Strisce LED 24VDC per uso professionale

- Adatto ad applicazioni professionali con flussi luminosi oltre 5000 lumen metro
- Utilizza LED 5630
- Alimentazione 24V, +3% -10%
- Per installazione su profili d'alluminio, possibilità di sezionare il modulo
- Morsetti rapidi di collegamento e giunzione fino a 11 moduli con alimentazione da un lato; 22 moduli con alimentazione da entrambi i lati.
- Disponibile nei colori standard 2700K, 3000K, 4000K e 5000K

 24VDC rigid LED BAR for professional use

- Suitable for professional applications requiring more than 5000 lumen per metre
- LED 5630
- 24V operation, +3% -10 %
- For installation in aluminium profiles; possibility of sectioning the module
- Fast terminals for connection and junction up to 11 modules (powered by one side); 22 modules (powered by both sides)
- Available in 2700K, 3000K, 4000K e 5000K

