

17/30
Watt



PF
 $\lambda \geq 0,96$

IP 65





EMC



SELV

$t_a -10^{\circ} \div +45^{\circ}C$

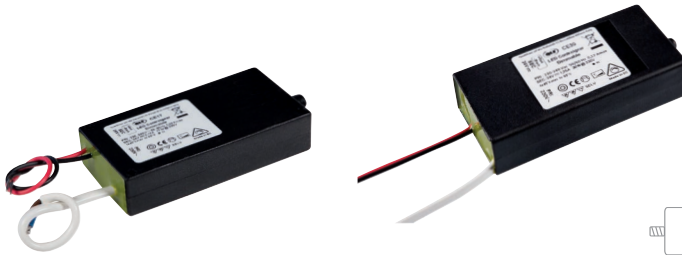

Part Number	Output V	Output I _{max}	W	Dimensions A x B x C	Protocol
A40CE017000N	24V/DC	0,71A	17W	99(110) x 44 x 22	TRIAC / IGBT / MOSFET
A40CE030000N	24V/DC	1,25A	30W	125(133) x 51 x 24	TRIAC / IGBT / MOSFET



Datasheet download

Alimentatore dimmerabile per LED di potenza

- Alimentatore indipendente da incorporare - IP65 - Classe II di isolamento
- Regolazione della luce con dimmer TRIAC, IGBT, MOSFET per carichi resistivi e induttivi con carico minimo adeguato
- Uscita fissa 24VDC
- Protezione autoripristinante contro le sovratemperature, contro il circuito aperto ed i corto-circuiti sul secondario.
- Alimentazione: 230V/AC +/- 10% - Uscita stabilizzata.

Dimmable driver for High Brightness LEDs

- Independent driver to be built in - IP65 - Insulation class II
- Light regulation by primary side TRIAC, IGBT, MOSFET dimmers for resistive and inductive loads with min. rated load
- Fixed output 24V/DC
- Self-resetting protection against overtemperatures against open circuit and against output short circuits.
- Input voltage: 230V/AC +/- 10% - Steady output.

