

Technical details

Product No.	A41COB2415xx	A41COB2488xx
Led Q.ty (LEDs/m)	480	320
Led Type	COB	COB
Power (W/M)	14,4	8
Voltage (V)	24 ±3%	24 ±3%
Current (mA/M)	600	333
CRI (Ra)	≥ 90	≥ 90
Lenght/Reel (M)	5	5
Beam	180°	180°
Water-proof rating	IP20	IP20

Non-directional or directional light source:	Non-directional (NDLS)
Mains or non-mains light source:	Non-mains (NMLS)
Dimmable:	Only with specific LED drivers
Cables type A41COB2415xx:	PVC 80°C 20AWG lenght 15cm (single ended)
Cables type A41COB2488xx	PVC 80°C 20AWG lenght 36cm (double ended)
Pcb material:	COPPER
Tape type A41COB2415xx:	3M VHB
Tape type A41COB2488xx:	3M 9080
Energy rating:	G/F (EU 2019/2015) *
Protection against electric shock:	Class III
Version:	Integral
Safety isolating:	See electronic controlgear
Lumen maintenance factor:	96%
Survival factor:	100%
Nominal lifetime LM-80:	L70 B50 >36000 h
Photobiological Safety (Blue light hazard) according to IEC TR 627778:	Risk Exempt (RG0 group)

*Energy class is calculated according to Spectrum test measurements

LED STRIPS – LED COB – 24V – IP20

Lumens per meter

Color Temperature	A41COB2415xx	A41COB2488xx
2700K	1250 lm	750 lm
3000K	1290 lm	780 lm
4000K	1340 lm	890 lm

• Due to tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.

Efficacy


Color Temperature	A41COB2415xx	A41COB2488xx
2700K	87 lmW	94 lmW
3000K	90 lmW	98 lmW
4000K	93 lmW	111 lmW


• Note: "xx"=CCT "27"(2700K)/"30"(3000K)/"40"(4000K)

Working conditions

Working Temperature (°C)	-20 ÷ 50
Storage Temperature (°C)	-30 ÷ 80
Voltage Range (Vdc)	23 ÷ 25
Reverse Voltage (Vdc)	25
Reference temperature (Tc)	80° C

Dimensions – A41COB2415xx

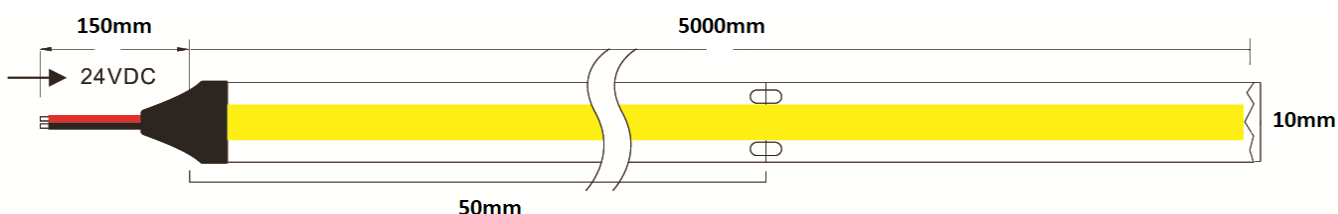

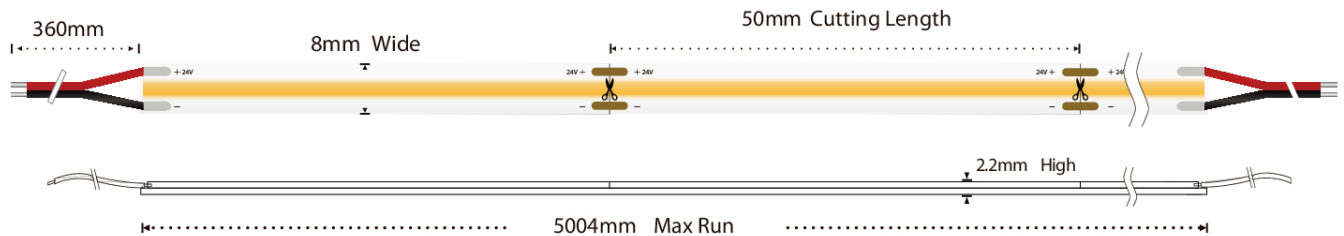Dimensions – A41COB2488xx

Weight/5m reel

A41COB2415xx	165 gr.
A41COB2488xx	100 gr.

Energy labelling (EU 2019/2015) and Ecodesign (EU 2019/2020) regulations

Part Number	N° EPREL	EU 2019/2015 Energy rating	EU 2019/2020 Compliance
A41COB2415xx – 2700K	1042206	G	COMPLIANT
A41COB2415xx – 3000K	1042213	G	COMPLIANT
A41COB2415xx – 4000K	1042219	F	COMPLIANT
A41COB2488xx – 2700K	1017544	F	COMPLIANT
A41COB2488xx – 3000K	1017550	F	COMPLIANT
A41COB2488xx – 4000K	1017556	F	COMPLIANT

The scan of the QR Code on the energy label of the product refers directly to the description of the model in the EPREL (EU Product Database for Energy Labelling) database, where it is possible to download the energy labels and the information sheet of the product.

In alternative, it is possible to access the database using the model registration number (EPREL ID), which you can obtain from the product supplier.

Just insert in the browser the link <https://eprel.ec.europa.eu/screen/product/lightsources/> and add the EPREL ID after the last slash.

Safety warning

- Install in accordance with national standards and local electrical codes.
- This product must be installed and maintained by a qualified electrician.
- Only install it with Class 2 DC constant voltage driver, do not use this product if it does not comply with Class 2 standard.
- The power of drive must meet the output of the rated power, and do not exceed the specified output power.
- Use a cable with rated temperature at least 80 ° C and be certified for external connection of the electrical equipment.
- Improper electrical installation may cause the cable to overheat and cause a fire. Please use a suitable cable between the driver, the lamp, and the controller. When selecting a wire, the voltage and current must meet the rated values.
- The LED module itself and all its components must not be mechanically stressed.
- Assembly must not damage or destroy conducting paths on the circuit board.
- To avoid mechanical damage, the LED modules should be mounted securely to the intended substrate. Heavy vibration should be avoided.
- Installation of LED modules (with power supplies) needs to be made with regard to all applicable electrical and safety standards. Only qualified personnel should be allowed to perform installations.
- Observe correct polarity! Incorrect polarity will lead to no light emission and may cause damage of the LED module.
- Parallel connection is highly recommended as safe electrical operation mode. Serial connection is not recommended. Unbalanced voltage drop can cause hazardous overload and damage the LED module.
- When mounting on metallic or otherwise conductive surfaces, there needs to be an electrical isolation at soldering points between module and the mounting surface.
- Pay attention to ESD steps when mounting the module.
- Please ensure that the power supply is of adequate power to operate the total load.
- Damage by corrosion will not be honored as a materials defect claim. It is the user's responsibility to provide suitable protection against corrosive agents such as moisture and condensation and other harmful elements.
- For applications involving exposure to humidity and dust the module must be protected by a fixture or housing with a suitable protection class.
- This product is not resistant to vulcanization, LED vulcanization damage will not be compensated. It is the responsibility of the user to provide appropriate protection against harmful sulphide components.