

4,8/18
Watt/m

IP 20

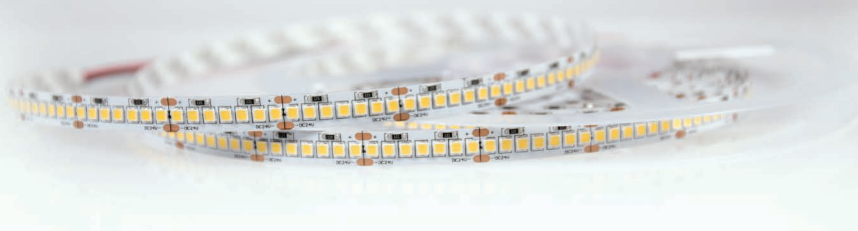
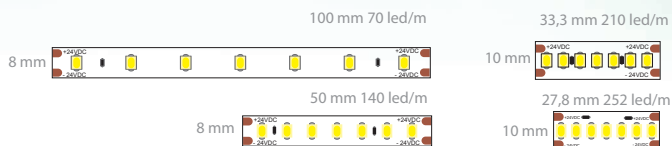
CRI>80



ta -10° ÷ +40°C



Datasheet download

up to
180 lm/w

Part Number	CCT (K)	Lumen/m	LED/m	V (Typ)	Cut	W/m	IP	EEC*
A41H24070027	2700K	630	70	24V/DC	100mm	4,8W	IP20	E
A41H24070030	3000K	658	70	24V/DC	100mm	4,8W	IP20	E
A41H24070040	4000K	732	70	24V/DC	100mm	4,8W	IP20	D
A41H24070060	6000K	690	70	24V/DC	100mm	4,8W	IP20	E
A41H24140024	2400K	1250	140	24V/DC	50mm	9,6W	IP20	E
A41H24140027	2700K	1306	140	24V/DC	50mm	9,6W	IP20	E
A41H24140030	3000K	1332	140	24V/DC	50mm	9,6W	IP20	E
A41H24140040	4000K	1380	140	24V/DC	50mm	9,6W	IP20	E
A41H24140060	6000K	1700	140	24V/DC	50mm	9,6W	IP20	C
A41H24210027	2700K	1890	210	24V/DC	33,3mm	14,4W	IP20	E
A41H24210030	3000K	1970	210	24V/DC	33,3mm	14,4W	IP20	E
A41H24210040	4000K	2040	210	24V/DC	33,3mm	14,4W	IP20	E
A41H24210060	6000K	2210	210	24V/DC	33,3mm	14,4W	IP20	D
A41H24252027	2700K	2320	252	24V/DC	27,8mm	18W	IP20	E
A41H24252030	3000K	2360	252	24V/DC	27,8mm	18W	IP20	E
A41H24252040	4000K	2460	252	24V/DC	27,8mm	18W	IP20	E
A41H24252060	6000K	2520	252	24V/DC	27,8mm	18W	IP20	E

** The EEC specification refers in each case to the installed LED light source(s)

🇮🇹 Strisce flessibili a LED 24V autoadesive IP20

- LED 2835 ad alta efficienza e a bassa caduta di tensione
- Realizzata in moduli da 7 LED per una diminuzione delle perdite in calore e migliore resa luminosa. Consumo ridotto, alto rendimento
- Disponibile nei colori standard 2700K, 3000K, 4000K e 6000K
- Fornite in nastro da 5m e cavetto di raccordo.

🇬🇧 24V Flexible adhesive LED strips IP20

- LED 2835 with high lumen efficiency and low voltage drop
- 7LED segment for a reduction of heat losses and higher lumen efficiency - Reduced consumption, higher efficiency
- Available in standard 2700K, 3000K, 4000K and 6000K
- Supplied in 5m roll with connecting cable

