

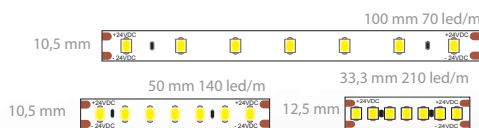
4,8/14,4
Watt/m

IP 68

CRI>80

t_a -10° ÷ +40°C

Datasheet download

up to
135 lm/w

Part Number	CCT (K)	Lumen/m	Ra	LED/m	V (Typ)	Cut	W/m	IP	EEC*
A41H24070I27	2700K	550	85	70	24V/DC	100mm	4,8W	IP68	F
A41H24070I30	3000K	570	89	70	24V/DC	100mm	4,8W	IP68	F
A41H24070I40	4000K	650	88	70	24V/DC	100mm	4,8W	IP68	E
A41H24070I60	6000K	640	91	70	24V/DC	100mm	4,8W	IP68	E
A41H24140I27	2700K	1080	85	140	24V/DC	50mm	9,6W	IP68	F
A41H24140I30	3000K	1110	89	140	24V/DC	50mm	9,6W	IP68	F
A41H24140I40	4000K	1240	88	140	24V/DC	50mm	9,6W	IP68	E
A41H24140I60	6000K	1220	91	140	24V/DC	50mm	9,6W	IP68	E
A41H24210I27	2700K	1600	85	210	24V/DC	33,3mm	14,4W	IP68	F
A41H24210I30	3000K	1660	89	210	24V/DC	33,3mm	14,4W	IP68	F
A41H24210I40	4000K	1860	88	210	24V/DC	33,3mm	14,4W	IP68	E
A41H24210I60	6000K	1780	88	210	24V/DC	33,3mm	14,4W	IP68	E

** The EEC specification refers in each case to the installed light source(s)

Strisce flessibili a LED 24V autoadesive IP68

- LED 2835 ad alta efficienza e a bassa caduta di tensione
- Realizzata in moduli da 7 LED per una diminuzione delle perdite in calore e migliore resa luminosa - Consumo ridotto, alto rendimento
- Disponibile nei colori standard 2700K, 3000K, 4000K e 6000K
- Fornite in nastro da 5m e cavetto di raccordo.

24V Flexible adhesive LED strips IP68

- LED 2835 with high lumen efficiency 140lm/W and low voltage drop
- 7LED segment for a reduction of heath losses and higher lumen efficiency - Reduced consumption, higher efficiency
- Available in standard 2700K, 3000K, 4000K and 6000K
- Supplied in 5m roll with connecting cable

