




200 Watt
CV
Dimmable
Dimmable 0/1..10
DALI Dimmable
PF $\lambda \geq 0,96$
IP 20
CE
EMC
SELV
M
M
F
110

$t_a -10^{\circ}\div +40^{\circ}\text{C}$
DIN 35mm

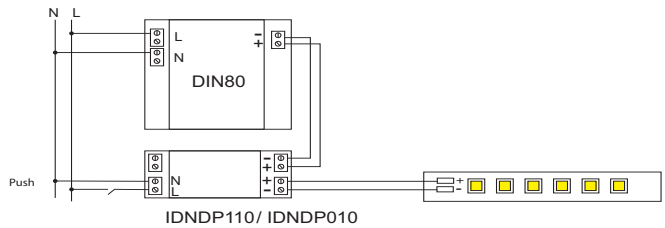

Part Number	input V	Ouput I _{max}	Ouput V _{max}	W	Dimensions A x B x C	Protocol
A40IDNDP0100	24V	8,33A	V _{in} -0,5V	200W	90 x 36 x 61	DALI / PUSH / 0-10V
A40IDNDP0100	24V	8,33A	V _{in} -0,5V	200W	90 x 36 x 61	DALI / PUSH / 1-10V

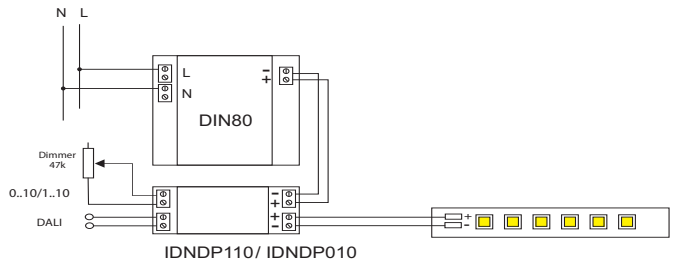

Datasheet download

Interfaccia DALI/PUSH + 0-10V o 1-10V per sistemi DIN RAIL

- Comando DALI/pulsante + 0-10V o 1-10V
- Alimentazione 24V/DC
- Uscita PWM 1kHz

DALI/PUSH + 0-10V o 1-10V interface for DIN systems

- Dimming control by DALI/PUSH + 0-10V o 1-10V signal
- Input 24V/DC
- PWM 1kHz output

