

300/600
Watt



IP 20



EMC



$t_a - 10^{\circ} \div +45^{\circ}C$



84 mm


DMX
Dimmable

DALI
Dimmable

Dimmable



DALI RGB-AF DT8



Part Number	Protocol	Input V	Output V	Vout	Output@230V I max 3ch	Output@230V I max 4ch	W @230V	Dimensions A x B x C
A40INTRGB4EB	DALI DT8 / PUSH	24V	24V	Vin-0,2V	3 x 4,16A	4 x 6,25A	150W / ch	210 x 75 x 35
	DMX	24V	24V	Vin-0,2V	3 x 4,16A	4 x 3,125A	75W / ch	210 x 75 x 35



Datasheet download


Interfaccia RGBW a 4 canali e RGB a 3 canali

- Interfaccia di controllo - IP40 - Classe II di isolamento
- Configurabile per 3 o 4 canali di uscita per LED di potenza RGB e RGBW
- Funzionamento in tensione costante. Uscita 4 x 24V PWM o 3 x 24V PWM
- Ingresso pulsante bassa tensione e ingresso pulsante alta tensione. Accensione, regolazione e spegnimento con uno o più pulsanti
- Ingresso DMX o DALI DT8 con funzione auto-test e LED di segnalazione
- Curva di regolazione lineare o esponenziale.
- Terminatore DMX selezionabile incorporato
- Collegamento in parallelo fino a max 10 pezzi
- Doppio morsetto
- Morsetti rapidi
- Pressacavo adatto a vari tipi di cavo, sia tondi che piatti

Interface for RGBW 4-channel and RGB 3-channel

- Control Interface - IP40 - Insulation class II
- Configuration by 3 or 4 output channels for RGB and RGBW led applications.
- Constant voltage operation. Output 4 x 24V PWM o 3 x 24V PWM
- Low Voltage push-button input and High Voltage push button input - On, off and colour regulation by one or more push-buttons
- DMX and DALI DT8 inputs with self-test function and LED signal
- Regulation curve: linear or exponential
- DMX Resistor settable by dip switches
- Possible parallel connection up to 10 x interfaces
- Fast terminals
- Cable clamp for flat and round cables
- Double terminal block



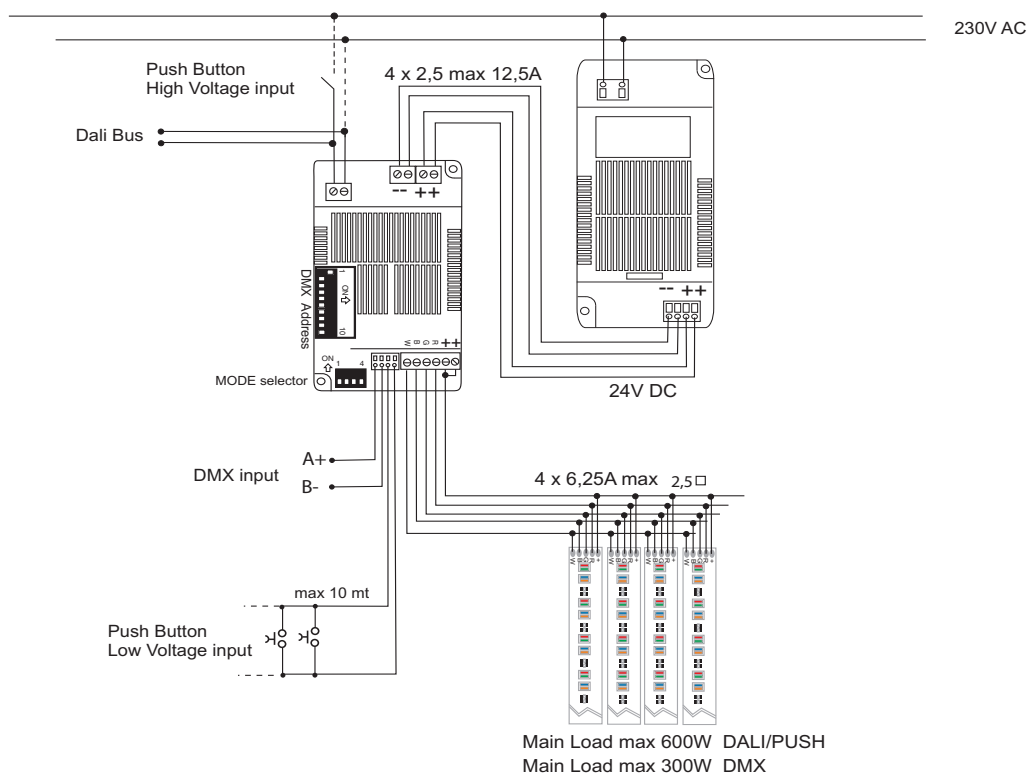

 Per visualizzare nel dettaglio tutte le varie tipologie di impianto / sistemi di controllo, scaricare il file qui sotto.

 For all types of control and installation systems, download the file here under



Instruction download