



18 Watt/m IP 67 CRI>80 III   $t_a -10^{\circ} \div +40^{\circ}C$

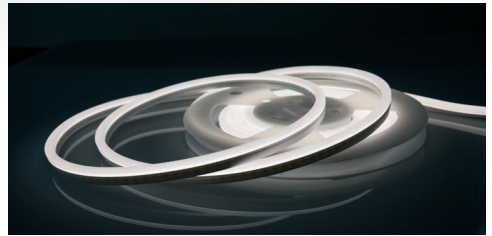

Part Number	CCT (K)	LUMEN/m	Ra	LED/m	V (Typ)	Cut	W/m	IP
A41N2412F027	2700K	580	87	120	24VDC	50mm	18W	IP67
A41N2412F030	3000K	600	88	120	24VDC	50mm	18W	IP67
A41N2412F040	4000K	700	88	120	24VDC	50mm	18W	IP67
A41KITN2412F	Kit: 10x brackets with screws, 2x caps with hole, 2x end caps, 2 x glue tubes							
A41FIXN2412F	1 single fixing bracket							
BAR0816AL100	1mt aluminum profile							



Datasheet download

### Strisce flessibili a LED 24V IP67

- Emissione della luce da tre lati (tipo F)
- 120 led/m - 18W/m - LED 2835
- Movimento orizzontale (SIDE),  $\varnothing > 60\text{mm}$ .
- Fornite con 10 clips, 10 viti, 2 tappi per ripartenza, 4 tappi chiusura e 2 tubetti di silicone
- Strisce da incorporare direttamente senza profilo.
- Ridotta spaziatura dei LED per una luce continua senza punti
- Disponibile nei colori standard : 2700K, 3000K o 4000K
- Fornite in nastro da 5m e cavetto di raccordo

### 24V Flexible LED strips IP67

- Three side light emission (F type)
- 120 led/m - 18W/m - LED 2835
- Horizontal (SIDE) bending,  $\varnothing > 60\text{mm}$ .
- Supplied with 10 clips, 10 screws, 2 open caps for rewiring, 4 end caps and 2 silicon paste
- Direct installation (no profile needed)
- Reduced space between diodes for homogeneous output light
- Color temperatures available: 2700K, 3000K or 4000K
- Supplied in 5m reels with connecting cable