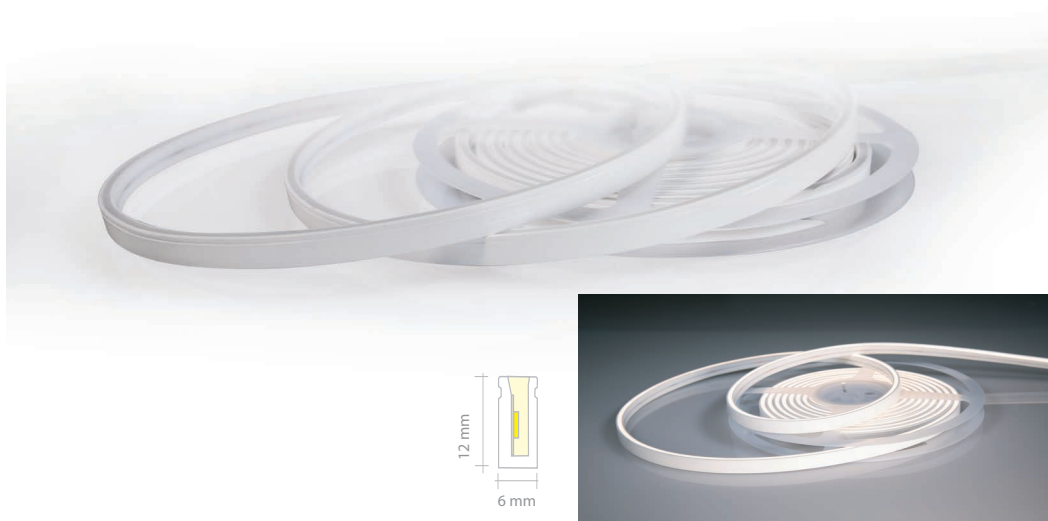


18  
Watt/m

IP 67

CRI&gt;80

t<sub>a</sub> -10° ÷ +40°C

Part Number	CCT (K)	Lumen/m	LED/m	V (Typ)	Cut	W/m	IP
A41N2412L027	2700K	400	120	24VDC	50mm	18W	IP67
A41N2412L030	3000K	440	120	24VDC	50mm	18W	IP67
A41N2412L040	4000K	470	120	24VDC	50mm	18W	IP67
A41KITN2412L	Kit: 10x brackets with screws, 2x caps with hole, 2x end caps, 2x glue tubes						
A41FIXN2412L	1 single fixing bracket						
BAR0612AL100	1mt aluminum profile						



Datasheet download

**Strisce flessibili a LED 24V IP67**

- Emissione della luce da un lato - lama di luce (tipo L)
- 120 led/m - 18W/m - LED 2835
- Movimento orizzontale (SIDE) , Ø>60mm.
- Fornite con 10 clips, 10 viti, 2 tappi per ripartenza, 4 tappi chiusura e 2 tubetti di silicone
- Strisce da incorporare direttamente senza profilo .
- Ridotta spaziatura dei LED per una luce continua senza punti
- Disponibile nei colori standard: 2700K, 3000K e 4000K
- Fornite in nastro da 5m e cavetto di raccordo.

**24V Flexible LED strips IP67**

- One side light emission - light blade version (L type)
- 120 led/m - 18W/m - LED 2835
- Horizontal (SIDE) bending, Ø>60mm.
- Supplied with 10 clips, 10 screws, 2 open caps for rewiring, 4 end caps and 2 silicon paste
- Direct installation (no profile needed)
- Reduced space between diodes for homogeneous output light
- Color temperatures available: 2700K, 3000K and 4000K
- Supplied in 5m reels with connecting cable

