



Part Number	Output V	Output@230V I Max	W @230V	Output@110V I max	W @110V	Dimensions A x B x C	Protocol
A40PDCVD000B	24V/DC	0,58A	13W	0,41A	10W	138 x 40 x 28,5	DALI / PUSH
A40PDCVD120B	12V/DC	1,08A	13W	0,83A	10W	138 x 40 x 28,5	DALI / PUSH
A40PDCV1000B	24V/DC	0,58A	13W	0,41A	10W	138 x 40 x 28,5	1-10V

PUSH

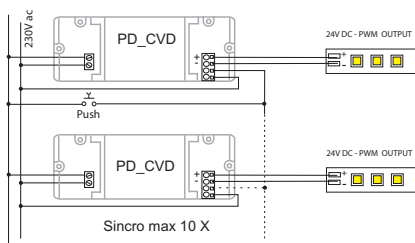

DALI / 1_10V

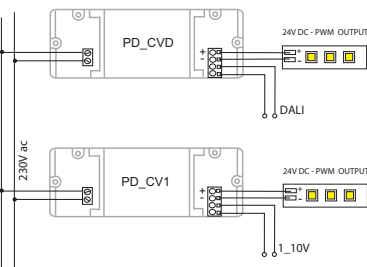

Datasheet download

Alimentatore LED dimmerabile DALI & Push - 1-10V

- Alimentatore indipendente - IP20 - Classe II di isolamento
- A40PDCVD000B: DALI o Pulsante sul lato primario - 12 o 24VDC PWM
- A40PDCV1000B: 1-10V - 24VDC PWM
- Protezione autoripristinante contro le sovratemperature, contro il circuito aperto ed i corto-circuiti sul secondario.
- Alimentazione: 110V ÷ 240V/AC - Uscita stabilizzata

Dimmable LED Driver DALI & Push - 1-10V

- Driver for independent mounting - IP20 - Insulation class II
- A40PDCVD000B: DALI or Push-Button on the primary side - 12 o 24VDC PWM
- A40PDCV1000B: 1-10V - 24VDC PWM
- Self-resetting protection against overtemperatures, open circuit and against output short circuits
- Input voltage: 110V ÷ 240V/AC - Steady output

