


11÷21 Watt
CC
PF $\lambda \geq 0,85$
IP 20
CE
EMC

M
M
F
110
SELV
45 mm

$t_a -10^{\circ} \div +40^{\circ}C$
AC/DC




Part Number	Iout	Vout Led Min	Vout Led Max	Vout Led max @110V	Uout	W @230V	W @110V	Dimensions A x B x c
A40PDMC0000B	250÷700mA	6V/15V*	44V	44V	48V	21W	15W	138 x 40 x 28,5

* Non interrompere sul secondario - Do not interrupt secondary side

Po Max at 100-120VAC	Po Max at 200-250VAC	Io	1	2	3	4
11W	11W	250mA	○	○	○	○
15W	15W	350mA	○	○	○	●
15W	17W	400mA	●	○	○	○
15W	19W	450mA	○	●	○	○
15W	21W	500mA	●	●	○	○
15W	21W	550mA	○	●	●	○
15W	21W	600mA	●	●	●	○
15W	21W	700mA	●	●	●	●

Before use, always check dipswitch settings

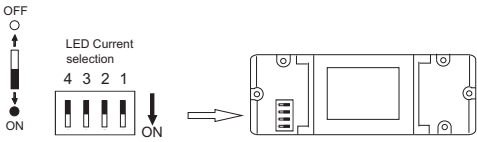

Datasheet download

- Alimentatore multicorrente per LED di potenza**
- Alimentatore indipendente - IP20 - Classe II di isolamento
 - Uscita in corrente costante 250÷700mA, ±5%, programmabile con DIP-SWITCH (vedi schema)
 - Protezione autoripristinante contro le sovratemperature, contro il circuito aperto ed i corto-circuiti sul secondario
 - Pressacavo adatto a vari tipi di cavo, sia tondi che piatti
 - Alimentazione : 110÷240V/AC- Uscita stabilizzata

- Multicurrent driver for High Brightness LEDs**
- Independent driver - IP20 - Insulation class II
 - Output in steady current: 250÷700mA, ±5%, settable by DIP-Switches (see scheme)
 - Self-resetting protection against overtemperatures, against open circuit and against output short circuits
 - Cable clamp for flat and round cables
 - Input voltage: 110÷240V/AC- Steady output.