

13 Watt

CC

SELV

PF $\lambda \geq 0,60$

IP 20

CE

EMC

M


M

F

$t_a -10^{\circ} \div +40^{\circ}C$




- DALI Dimmable
- Dimmable
- Dimmable 1..10



Part Number	Iout	Vout Led Min	Vout Led Max	Vout Led max @110V	Uout	W @230V	W @110V	Dimensions A x B x C	Protocol
A40PDMCD000B	100÷700mA	8V	39V	36V	45V	13W	9W	138 x 40 x 28,5	DALI/PUSH
A40PDMC1000B	100÷700mA	6V	39V	36V	45V	13W	9W	138 x 40 x 28,5	1-10V

PO Max at 100-120VAC	PO Max at 200-250VAC	Io	1	2	3	4
3,9W	3,9W	100mA	○	○	○	○
5,8W	5,8W	150mA	●	○	○	○
7,8W	7,8W	200mA	●	●	○	○
9W	9,8W	250mA	●	●	●	○
9W	11,7W	300mA	●	●	●	●
9W	13W	350mA	●	●	●	●
9W	13W	400mA	●	●	●	●
9W	13W	450mA	●	●	●	●
9W	13W	500mA	●	●	●	●
9W	13W	550mA	●	●	●	●
9W	13W	600mA	●	●	●	●
9W	13W	650mA	●	●	●	●
9W	13W	700mA	●	●	●	●

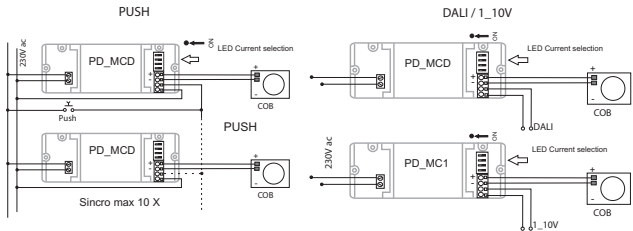

Datasheet download

Alimentatore LED dimmerabile multicorrente DALI & Push - 1-10V

- Alimentatore indipendente - IP20 - Classe II di isolamento
- Uscita in corrente costante 100÷700mA, ±5% programmabile con DIP-switches (vedi schema)
- A40PDMCD000B: DALI o Pulsante sul lato primario
- A40PDMC1000B: 1-10V
- Protezione autoripristinante contro le sovratemperature, contro il circuito aperto ed i corto-circuiti sul secondario.
- Alimentazione: 110V ÷ 240V/AC - Uscita stabilizzata

Multicurrent Dimmable LED Driver DALI & Push 1-10V

- Driver for independent mounting - IP20 - Insulation class II
- Output in steady current: 100÷700 mA, ± 5% settable by DIP-Switches (see scheme)
- A40PDMCD000B: DALI or Push-Button on the primary side
- A40PDMC1000B: 1-10V
- Self-resetting protection against overtemperatures, open circuit and against output short circuits
- Input voltage: 110V ÷ 240V/AC - Steady output

