

SPI NEON 24V IP67 RGB+White

DIGITAL SPI



12
Watt/m

IP 67

CRI>80




t_a -20° ÷ +40°C

Flame
resistant


UV
resistant

SALT
water

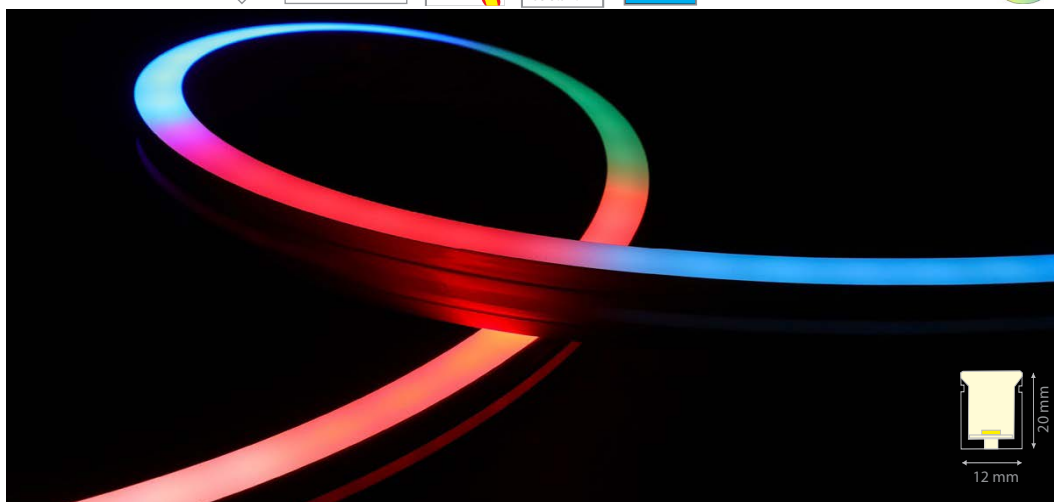

| Part Number | CCT (K) | Lumen/m | LED/m | V (Typ) | Cut | W/m | IP |
|--------------|-----------|---------|-------|---------|--------|-----|------|
| A41SPIN12RW3 | RGB+3000K | 800 | 84 | 24VDC | 83,3mm | 12W | IP67 |

Ø>80mm



SISTEMI DI CONTROLLO SUGGERITI:
RECOMMENDED CONTROL SYSTEMS:



Codice/Code: **A40SPI03000B**
RF receiver 2,4 GHz
Page: 204



Codice/Code: **A40WALLWP86K**
RF controller 2,4 GHz
Page: 203



Datasheet download

Strisce NEON DIGITAL SPI RGB+W - 24V - IP67

- LED 5050
- Strip led digitali che, grazie alla tecnologia IC pixel-to-pixel, permettono di creare effetti di luce avanzati
- Densità LED: 12 pixels per metro (1 IC per segmento 7 led)
- IC/UCS2904B
- 84led/m - 12W/m
- RGB+W (3000K)
- Fornite in nastro da 5m e cavetto di raccordo.

24V NEON RGB+W DIGITAL SPI LED strips - IP67

- LED 5050
- Digital Led strps that thanks to pixel-to-pixel IC technology allow to create advanced light effects.
- LED density: 12 pixelks per meter (7leds segment by 1 IC)
- IC/UCS2904B
- 84led/m - 12W/m
- RGB+W (3000K)
- Supplied in 5m roll with connecting cable