



RGBBox 3-Channels Constant Current

35 Watt
CC
PF $\lambda \geq 0,96$
EQUIV. SELV
IP 20
CE
EMC


M
M
F
110
 $t_a -10^{\circ}\div +40^{\circ}\text{C}$




 Software color cycles:
 25 sec (standard)
 96 sec (on request)



Part Number	Protocol	Iout	Vout/ch Min	Vout/ch Max	W/ch Max	Wtot Max	Dimensions A x B x C
A40RBOX350B	PUSH PWM 180Hz	350mA	6V	36V	12,5W	35W**	147 x 75 x 29

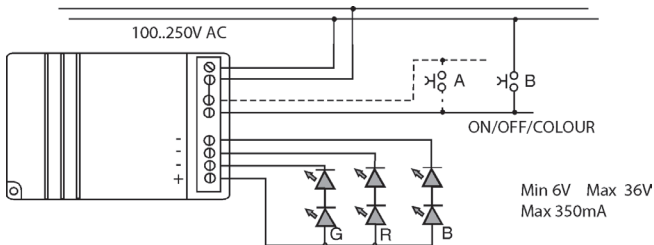

Datasheet download

Alimentatore per LED di potenza RGB 3 canali

- Alimentatore indipendente - IP20 - Classe II di isolamento
- Ingresso pulsante alta tensione. Comando della luce - accensione, regolazione e spegnimento - con uno o più pulsanti senza limiti di lunghezza
- Per LED di potenza RGB a corrente costante 350mA PWM 180Hz. Anodo comune
- Collegamento in parallelo fino a max 20 x RGBBox comandati dallo stesso pulsante.
- Alimentazione: 100=250V/AC

RGB Led Driver - 3 channel

- For independent mounting - IP20 - Insulation class II
- High voltage push button input. Light control - on, off and dimming - by one or more push-buttons (no limits of cable length)
- Suitable for RGB leds operating in constant current 350mA PWM 180Hz - Common anode
- Parallel connection for max 20 x RGBBox controlled by the same push-buttons.
- Input voltage: 100=250V/AC

