

100/400
WattPF
 $\lambda \geq 0,98$


IP 20



EMC

 $t_a -10^\circ \div +45^\circ \text{C}$ DMX
DimmableDALI
Dimmable

DALI RGBW-AF DT8



Part Number	Protocol	Output V	Output@230V I max 3ch	Output@230V I max 4ch	W @230V	W @110V	Dimensions A x B x C
A40RGBX424EB	DALI DT8 / PUSH	24V	3 x 4,16A	4 x 4,16A	100W / ch	60W / ch	210 x 75 x 35
	DMX	24V	3 x 1,38A	4 x 1,04A	33W/25W /ch	15W / ch	210 x 75 x 35



Datasheet download


Convertitori per LED di potenza RGBW a 4 canali e RGB a 3 canali

- Alimentatore indipendente - IP20 - Classe II di isolamento
- Comando della luce - accensione, regolazione e spegnimento con uno o più pulsanti - Ingresso pulsante bassa tensione + ingresso pulsante alta tensione.
- Regolazione Lin + Log
- Ingresso DMX e DALI con funzione auto-test incorporata e LED di segnalazione
- Configurabile per 3 o 4 canali di uscita
- Per LED di potenza RGBW e RGB a tensione costante. Uscita 4 x 24V PWM o 3 x 24V PWM 300Hz. Anodo comune.
- Collegamento in parallelo fino a max 10 x RGBBox4
- Morsetti rapidi
- Alto fattore di potenza
- Pressacavo adatto a vari tipi di cavo, sia tondi che piatti
- Alimentazione: 110÷240 V/AC - Uscita stabilizzata
- A richiesta, alimentazione specifica a 110V (uscita potenziata)

Driver for R G B W 4 channel and RGB 3 channel systems

- Independent driver - IP20 - Insulation class II
- Light control - on, off and colour regulation by one or more push-buttons - Input for low voltage push and input for high voltage push
- Lin + Log regulation
- DMX and DALI inputs with self-test function and LED signal
- Configuration for 3 or 4 output channels
- Suitable for RGBW systems and constant voltage RGB systems. Output 4 x 24V PWM or 3 x 24V PWM 300Hz. Common anode
- Possible parallel connection up to 10 x RGBBox4 drivers
- Fast terminals
- High power factor
- Cable clamp for flat and round cables
- Input voltage: 110÷240 V/AC - Steady output.
- On request, specific boosted 110V version



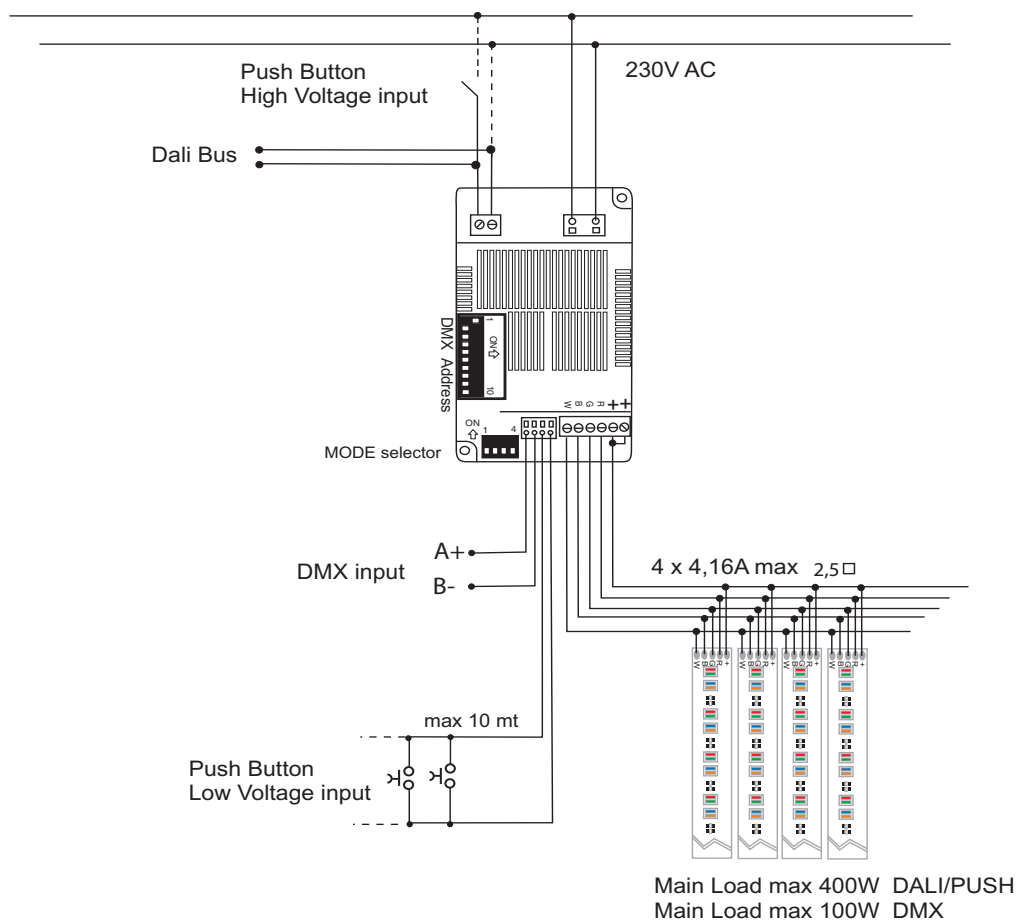

 Per visualizzare nel dettaglio tutte le varie tipologie di impianto / sistemi di controllo, scaricare il file qui sotto.

 For all types of control and installation systems, download the file here under



Instruction download